




ISUZU CITIPORT 12 CNG

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

ISUZU CITIPOINT 12 CNG

TECHNICAL SPECIFICATIONS

	ISUZU CITIPOINT 12 CNG	ISUZU CITIPOINT 12 CNG HP
Dimensions (mm)		
Maximum Length	12030	
Maximum Width	2550	
Maximum Height	3398 (inc.CNG tanks)	
Wheelbase	5850	
Front Overhang	2700	
Rear Overhang	3480	
Weights (kg)		
Gross Vehicle Weight	18700	
Engine		
Model	CUMMINS L9NE6D	CUMMINS L9NE6D
Type	CNG Turbocharged	CNG Turbocharged
Number of Cylinders	6	6
Displacement (cc)	8900	8900
Maximum Power (kW/HP)/rpm	209 (280) / 2200	235 (320) / 2000
Maximum Torque (Nm/rpm)	1220 / 1300	1357 / 1300 - 1400
Emission Standard	Euro VI OBD-D	Euro VI OBD-D
Transmission		
Model	ZF 6 AP 1400 EMF	
Number of Gears	6 Forward, 1 Reverse	
Steering System		
	Hydraulic and Adjustable Dashboard and Steering	
	Wheel Column in Height and Inclination	
Tyres		
Tyre Sizes	275/70 R22,5	
Suspension		
Front	Air Suspension - 2 Bellows Independent Suspension Electronically Controlled (ECAS)	
Rear	Air Suspension - 4 Bellows Electronically Controlled (ECAS)	
Anti Roll Bar	S	
Kneeling System (ECAS)	S	
Brake System		
Front / Rear System	Disc / Disc Full Air Brake System With EBS (Automatic Oil, Water Separator System is Optional) Intarder (Retarder is Integrated to Transmission)	
Parking Brake	S	
Auxiliary Brake	S	
Fuel Tank		
Gas Tanks Capacity (L)	S 1520 L (5x304 L), Opt 1175 L (5x235 L) **	
Gas Filling Port	Compatible with NGV2	
Electrical System		
Battery	24V - 2 x 240 Ah	
Passenger Capacity*		
Standard Layout	27 Seated (3 Folded Seats) + 65 Standing	
Optional Layout	18 Seated + 74 Standing	
Layout with Wheelchair	27 Seated (3 Folded Seats) + 61 Standing + 1 Wheelchair	

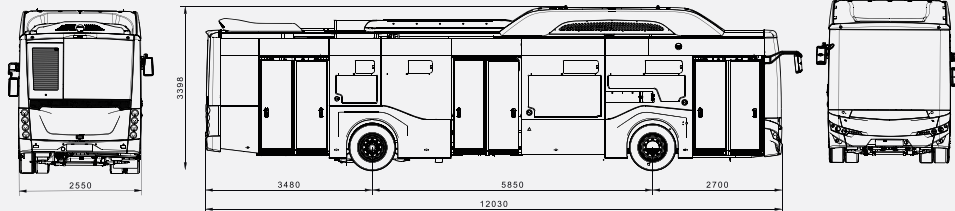

EQUIPMENTS

Heating and Ventilation	
Pre Heater	Opt
Air Conditioner	
Digital Air Conditioner	S
A/C With Heater	Opt
Safety & Driving Comfort	
Speed Limitor	S
Tachograph (Smart)	S
Tachograph (Digital)	Opt
Rear View Camera	S
Interior Camera	S (Inc. DVR)
Exterior Camera	S
Multiplex System	S
ABS	S
ASR	S
EBS	S
Bus Stop Brake (BSB)	S
Hillholder	S
Retarder	S
Parking Sensor	S
Spare Wheel	S
Tyre Inflation Unit	S
Reverse Gear Warning Beeper	S
Engine Compartment Fire Detection System	S
Engine Compartment Fire Detection and Automatic Fire Suppression System	Opt
Automatic Engine Oil Refill System	Opt
Fog Lamps	S (Front and Rear)
Day Time Running Lamps (DRL)	S
Locking System	S, (Opt: Square Lock)
Exterior	
Metallic Paint	Opt
Side Stripe Stickers	Opt
Skid Plate	S
Towing Device	S
Doors	
Number of Service Doors	3 Doors
Type of Service Doors	DoubleWing Air Actuated Interior Movement for All Front, Middle and Rear Doors Side Kneeling System and Ramp
Wheelchair Ramp	S
Wheelchair Ramp Sensor	S
Remote Control	S (Front Service Door)
Windows	
Type	Non-sliding, 1/4 Hinged Passenger Windows, Single Piece (S), With Slider, Double Piece (Opt) Single Glazed (S), Double Glazed (Opt)
Layers of Glass	
Interior	
Driver Seat	
Driver's Seat	Air Actuated, Adjustable
Steering	Adjustable Steering Wheel
Side Mirrors	Electrically Controlled , Heated
Driver's Cabin	Semi Glass (S), Full Glass (Opt)
Driver Overhead Cabinet	S
Coathanger for The Driver	S
Ticket Validator Preparation	Opt
Passenger Compartment	
Handrail Bars	Yellow (S), Grey (Opt), Stainless (Opt)
USB Charger for Passengers	Opt
Lightening & Signalization	
Digital Destination Display	Slither Route Display is (S) Rear Route Indicator Panel is (S) Colored Front Route Indicator Panel is (Opt)
Audio & Visual	
Radio System	Radio, USB, MP3 (S)
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Wifi Preparation	Opt
Wifi (Internet) Router	Opt
Driver Speaker	S

** if chosen 1175L, maximum height of vehicle is may increase

S: Standard **Opt:** Optional
* Different seating variations are available.